

# RG-RAP6262(G) Reyee Wi-Fi 6 AX1800 Outdoor Omni-directional Access Point

**DATASHEET** 



## / Highlights

- 'UFO' design, a perfect blend of Wi-Fi 6 technology and artwork
- IP68 protection, rock-solid in harsh environments
- Omni-directional coverage with long range
- Easily add extra outdoor Wi-Fi with Reyee Mesh
- Rack-separated mounting design, easily installation on high

## Highlight Features





......





## Highlight Features




### **Cloud, Make Your Business Easy**

- Remote monitoring
- Remote Wi-Fi management
- Cloud portal authentication

. . . . . . . . . . . . . . . . .

■ Wireless intelligent optimization

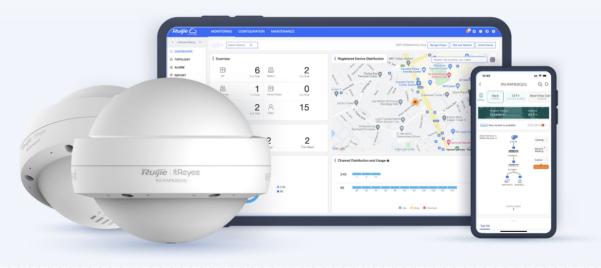

# **Specifications**

	Basic Feature	
Wi-Fi Standards	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave2) Wi-Fi 4(IEEE 802.11n)	
RF Design	2.4 GHz, 2 × 2, MU-MIMO 5 GHz, 2 × 2, MU-MIMO	
Max. Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 1201 Mbps	
Flash	16M	
Memory	256M	
Antenna	4	
Antenna Type	Built-in Omnidirectional	
Antenna Gain	2.4 GHz: 3 dBi 5 GHz: 4 dBi	
Transmit Power	EIRP $\leq 26 \text{ dBm}(2.4 \text{ GHz})$ $\leq 25 \text{ dBm}(5 \text{ GHz})$ country-specific restrictions apply Myamar: $2400 \text{ MHz} \sim 2483.5 \text{ MHz} \leq 20 \text{ dBm}$ $5150 \text{ MHz} \sim 5350 \text{ MHz} \leq 23 \text{ dBm}$ $5470 \text{ MHz} \sim 5850 \text{ MHz} \leq 25 \text{ dBm}$ Thailand: $2400 \text{ MHz} \sim 2483.5 \text{ MHz} \leq 20 \text{ dBm}$ $5470 \text{ MHz} \sim 5725 \text{ MHz} \leq 25 \text{ dBm}$ $5470 \text{ MHz} \sim 5725 \text{ MHz} \leq 25 \text{ dBm}$ $5725 \text{ MHz} \sim 5850 \text{ MHz} \leq 30 \text{ dBm}$	
Fixed Ports	2 × 10/100/1000 Base-T	
Max. Clients	256	
Recommended Clients	100	
Max. SSIDs	8	
Software Feature		
WLAN Basic Features		
SSID Hiding	✓	
Power Adjustment	<b>✓</b>	



Software Feature		
WLAN Basic Features		
Roaming	Layer 2 Roaming Layer 3 Roaming	
OFDMA	<b>✓</b>	
Target wake time (TWT)*	✓	
WMM	<b>✓</b>	
Radar Signal Detection and Frequency Hopping	<b>✓</b>	
WLAN Security		
Security Mode	WPA-PSK, WPA2-PSK, WPA/WPA2-PSK;	
Blacklist and Whitelist	<b>✓</b>	
Enhanced User Experience		
Wi-Fi Optimization	<b>✓</b>	
Automatic RF adjustment via the platform	<b>✓</b>	
User Isolation	Layer 2 User Isolation	
STA limit	<b>✓</b>	
Removing Low-RSSI STAs	<b>✓</b>	
Configuring STAs' RSSI Threshold	<b>✓</b>	
Average Speed Threshold	<b>✓</b>	
Adjusting Sending Rate of Beacon and Probe Response	<b>✓</b>	
Syslog Recording Why Users Lose Connection	~	
Auto Channel and Power Adjustment on Cloud	~	
RSSI Threshold for STA Access	<b>✓</b>	




Software Feature		
Networks		
Quick channel adjustment (auto channel selection)	~	
Network Access Mode	DHCP Client	
VLAN	<b>✓</b>	
	System	
Cloud Management	<b>✓</b>	
App Management	<b>✓</b>	
App Upgrade	<b>✓</b>	
App Restart	<b>✓</b>	
Scheduled Restart	<b>✓</b>	
Local Upgrade	<b>✓</b>	
Online Upgrade	~	
Factory Reset	<b>✓</b>	
	WLAN Features	
Frequency Bandwidth	2.4 GHz: 20/40 MHz 5 GHz: 20/40/80 MHz	
Recommended Wi-Fi Coverage Radius	2.4 GHz: 50m, 5 GHz: 150m	
Max. Wi-Fi Coverage Radius	2.4 GHz: 100m, 5 GHz: 300m	
Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac: 5.150 GHz to 5.350 GHz 802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply	
Receive Sensitivity		
Physical Phy		
LED Indicator	3 × System LED Indicator	




	Physical	
Buttons	1 × Reset Button	
Dimensions (W x D x H)	200 mm × 220 mm × 166 mm (Without Mounting Bracket)	
Weight	1.2 kg (Without Mounting Bracket)	
Power		
Power Supplies	IEEE 802.3at PoE DC 12V/1.5A	
Power Consumption	≤ 18W	
DC Port Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 10 mm	
Environmental Environmental		
Operating Temperature	-30°C to 65°C	
Storage Temperature	-40°C to 85°C	
Operating Humidity	0% to 100% (Noncondensing)	
Storage Humidity	0% to 100% (Noncondensing)	
IP(Ingress Protection)	IP68	
Port Surge	4 kV	
MTBF	>250000H	

## Antenna Schematic

#### 2.4GHz Pattern:

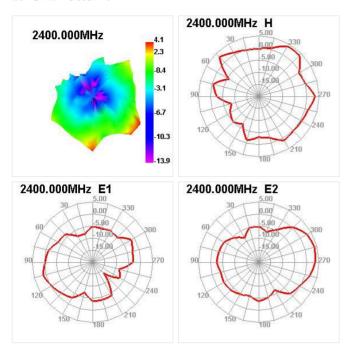

#### 5GHz Pattern:

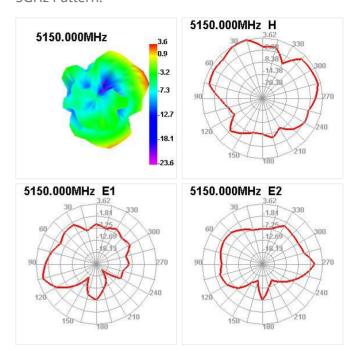

## Package Contents

Package Dimension (w x d x h)

Package Information	RG-RAP6262(G)
RG-RAP6262(G) Access Point	1
User Manual	1
Pole Clamps	2
Mounting Plate	1
Expansion Bolts (M8*60)	4
M8*20 Screws	2
Cable Glands (Pre-installed)	2
Connecting Rod (Pre-installed)	1
Warranty Card	1
Package Weight	2.94 kg

466 mm x 257 mm x 217 mm



Redefine your easy network

#### Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

#### Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.
Building 19, Juyuanzhou Industrial Park, No.618 Jinshan
Road, Cangshan District, Fuzhou, Fujian, China
Website: https://www.ruijienetworks.com